

Please park
within designated
parking bays



No Parking



**Fitzpatrick
Woolmer**

Woodsman™ Vehicle Warning Sign

Our rustic Oak **Woodsman™** vehicle warning signs provide a discreet yet effective solution for both rural and urban locations.

Crafted using traditional joinery techniques and enhanced with precise CNC engraving, each sign offers a unique combination of craftsmanship and durability. This ensures clear, customised messages and imagery that seamlessly integrate into traditional settings.

These signs are designed to blend with their surroundings while providing essential warnings, maintaining the character of the location.

Product features

- * Hardwood FEC and PEFC Oak construction
- * Permanently engraved lettering and logos
- * Preservative finish
- * Standard sizes 600mm x 175mm and 600mm x 350mm
- * 1 year manufacturer's warranty

Fitzpatrick Woolmer Design & Publishing Limited

Unit 7 Lakeside Park, Neptune Close, Rochester, Kent, ME2 4LT
t: 01634 711 771 e: info@fwdp.co.uk w: fwdp.co.uk



By Appointment to His Majesty The King
Manufacturer of Signs and Wayfinding
Fitzpatrick Woolmer Design & Publishing Ltd, Kent

Specification applies to the standard product.
Our range of options usually allow us to accommodate any differences you may require.
Please contact us and we will be happy to support you in developing this specification to meet your requirements.

Option delete/ update as appropriate

Manufacturer: Fitzpatrick Woolmer,
Unit 7 Lakeside Park, Neptune Close,
Rochester, Kent, ME2 4LT.

Tel: 01634 711 771

Email: info@fwdp.co.uk

Timber: FSC Prime Grade and PEFC QPA Grade generally to BS EN 975-1

Species: Oak

Origin: France

Moisture content on delivery: 10% - 80%

Certification: FSC chain of custody


Finish: Sadolin Classic wood preservative, solvent based, matt

Colour: Light Oak

Weight: 14kg

Installation: Posts extend 500mm below ground level

Guarantee: One year manufacturer's warranty

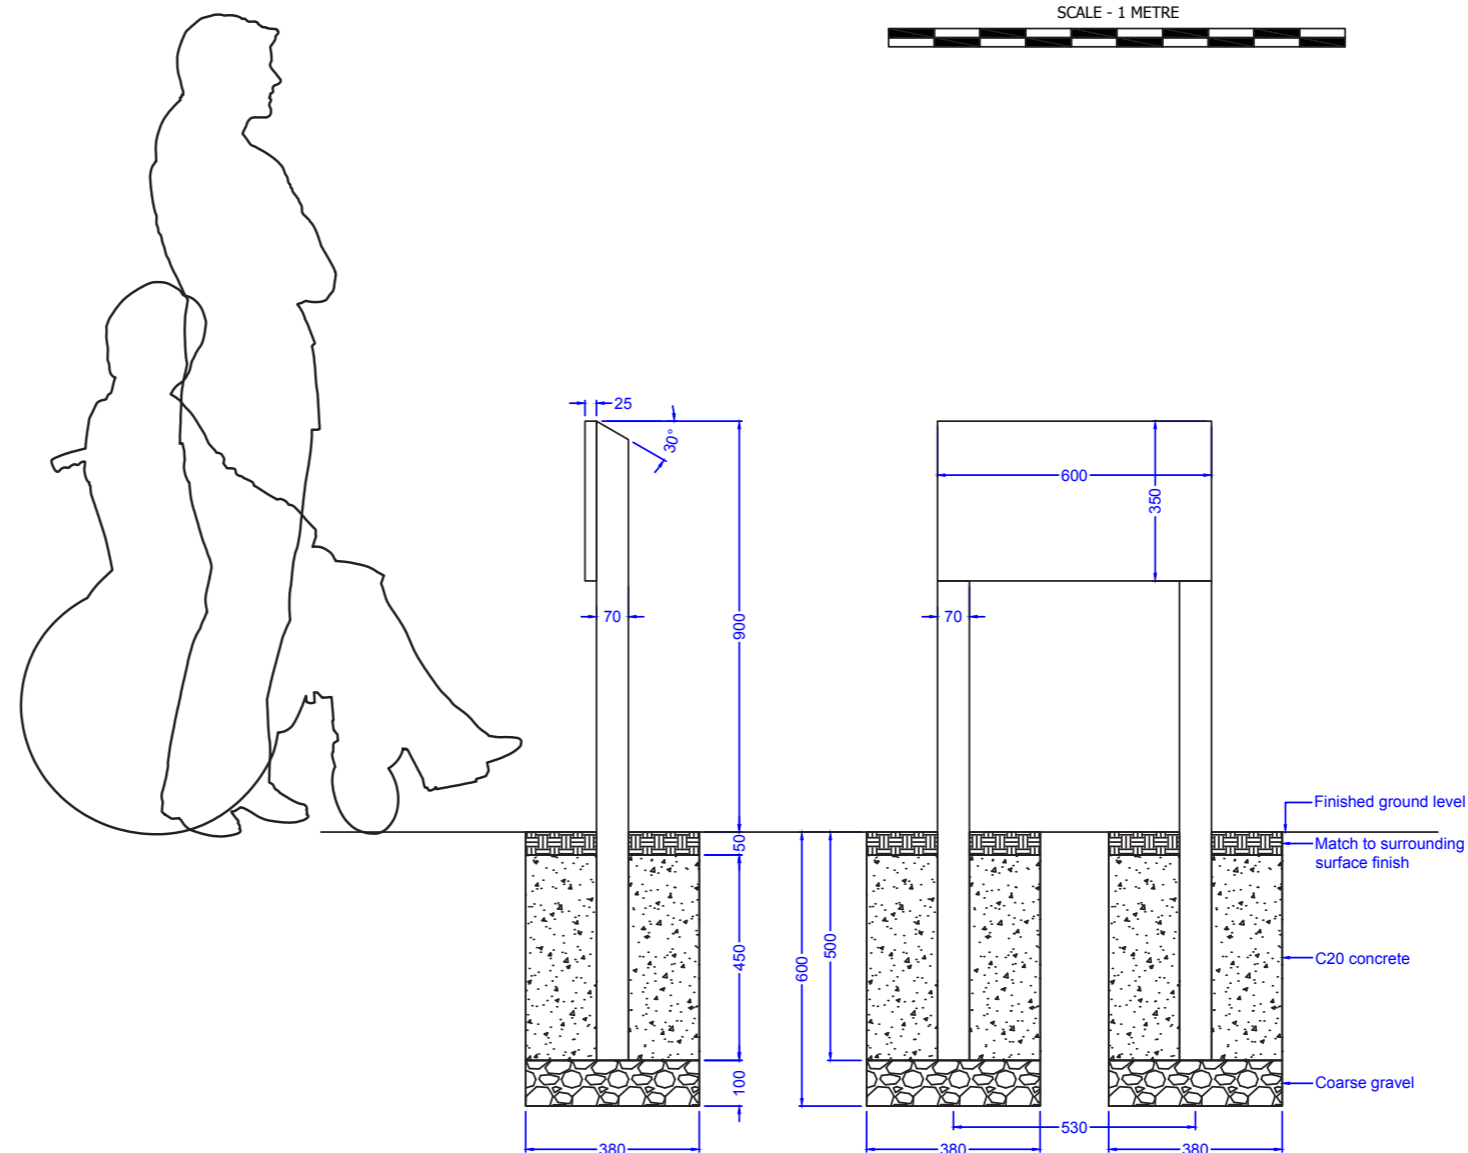

Note: All dimensions are indicative only. Footing details are subject to soil conditions and structural engineers recommendations.

